

CITY OF SACRAMENTO
1231 I Street, Sacramento, CA 95814

Permit No: 0105609
Insp Area: 2

Site Address: 1331 BROADWAY SAC
Parcel No: 009-0253-016

Sub-Type: NOTHR
Housing (Y/N): N

CONTRACTOR
DELTA ENERGY & LIGHTING
3261 FITZGERALD RD
RANCHO CA 95742

OWNER
BANK OF CALIFORNIA THE SUMITOMO
331 BROADWAY
SACRAMENTO CA 95818

ARCHITECT

Nature of Work: INSTALL TWO NEW PARKING LOT POLE STANDARD WITH 2 400 WATT METAL HALIDE SHOE BOX FIXTURE PER POLE

CONSTRUCTION LENDING AGENCY: I hereby affirm under penalty of perjury that there is a construction lending agency for the performance of the work for which this permit is issued (Sec. 3097, Civ. C).

Lender's Name _____ Lender's Address _____

LICENSED CONTRACTORS DECLARATION: I hereby affirm under penalty of perjury that I am licensed under provisions of Chapter 9 commencing with section 7000) of Division 3 of the Business and Professions Code and my license is in full force and effect.

License Class B-CIC License Number 743539 Date 5/4/01 Contractor Signature [Signature]

OWNER-BUILDER DECLARATION: I hereby affirm under penalty of perjury that I am exempt from the contractors License Law for the following reason (Sec. 7031.5, Business and Professions Code: any city or county which requires a permit to construct, alter, improve, demolish, or repair any structure, prior to its issuance, also requires the applicant for such permit to file a signed statement that he or she is licensed pursuant to the provisions of the Contractors License Law (Chapter 9 (commencing with Section 7000) of Division 8 of the Business and Professions Code) or that he or she is exempt therefrom and the basis for the alleged exemption. Any violation of Section 7031.5 by any applicant for a permit subjects the applicant to a civil penalty of not more than five hundred dollars (\$500.00).

I, as a owner of the property, or my employees with wages as their sole compensation, will do the work, and the structure is not intended or offered for sale (Sec. 7044, Business and Professional Code). The Contractors License Law does not apply to an owner of property who builds or improves thereon, and who does such work himself or herself or through his/her own employees, provided that such improvements are not intended or offered for sale. If, however, the building or improvement is sold within one year of completion, the owner-builder will have the burden of proving that he/she did not build or improve for the purpose of sale.)

I, as owner of the property, am exclusively contracting with licensed contractors to construct the project (Sec. 7044, Business and Professions Code: The Contractors License Law does not apply to an owner of property who builds or improves thereon, and who contracts for such projects with a contractor(s) licensed pursuant to the Contractors License Law)

I am exempt under Sec. _____ B & PC for this reason: _____

Date _____ Owner Signature _____

IN ISSUING THIS BUILDING PERMIT, the applicant represents, and the city relies on the representation of the applicant, that the applicant verified all measurements and locations shown on the application or accompanying drawings and that the improvement to be constructed does not violate any law or private agreement relating to permissible or prohibited locations for such improvements. This building permit does not authorize any illegal location of any improvement or the violation of any private agreement relating to location of improvements.

I certify that I have read this application and state that all information is correct. I agree to comply with all city and county ordinances and state laws relating to building construction and hereby authorize representative(s) of this city to enter upon the above-mentioned property for inspection purposes.

Date 5/4/01 Applicant/Agent Signature [Signature]

WORKER'S COMPENSATION DECLARATION: I hereby affirm under penalty of perjury one of the following declarations:

I have and will maintain a certificate of consent to self-insure for workers' compensation as provided for by Section 3700 of the Labor Code, for the performance of work for which the permit is issued

I have and will maintain workers' compensation insurance, as required by Section 3700 of the Labor Code, for the performance of the work for which this permit is issued. My workers' compensation insurance carrier and policy number are:

Carrier EXPLORER INSURANCE CO Policy Number WSA1699145-00 Exp Date 10/01/2001

(This section need not be completed if the permit is for \$100 or less.) I hereby affirm under penalty of perjury the performance of the work for which this permit is issued, I shall not employ any person in any manner so as to become subject to the provisions of the Labor Code, Chapter 1, Section 3700, of the laws of California and agree that if I should become subject to the workers' compensation provisions of Section 3700 of the Labor Code, I shall forthwith comply with those provisions.

Date 5/4/01 Applicant Signature [Signature]

WARNING: FAILURE TO SECURE WORKER'S COMPENSATION COVERAGE IS UNLAWFUL AND SHALL SUBJECT AN EMPLOYER TO CRIMINAL PENALTIES AND CIVIL FINES UP TO ONE HUNDRED THOUSAND DOLLARS (\$100,000) IN ADDITION TO THE COST OF COMPENSATION, DAMAGES AS PROVIDED FOR IN SECTION 3706 OF THE LABOR CODE, INTEREST AND ATTORNEY'S FEE.

THIS PERMIT SHALL EXPIRE BY LIMITATION IF WORK IS NOT COMMENCED WITHIN 180 DAYS.

Date of Request: _____

By: _____

CITY OF SACRAMENTO DEVELOPMENT SERVICES DIVISION
PLANNING AND ZONING INFORMATION REQUEST

Project Address: 23 FARMER

Assessor's Parcel Number: 091 253 ~~000~~ 005

Previous Use: PARKING LOT

Description of Request/Proposed Use: ADD LIGHT FIXTURES

TO BE ON THE PARKING LOT FOR
CAL FIRE TRUCK

Is This a Change of Use? NO

Prior Applications for Project Site(P#, Z#, DRPB#) 091 389 DR 90 300 Zoning Designation: C 2 (GENERAL COMMERCIAL)

Comments: APPROVED PER PERMIT DRAWINGS
PROJ. PER DR. PLAN -> APPD (SIGNED EFF-BY ELLEN)

WATER INSTALLATION

Are There Any Planning Issues?: (circle one) YES NO

- * Staff Site Plan Check Required? (Circle one) YES NO COMMERCIAL
- * Field Inspection Required? (Circle one) YES NO
- * Design Review/Preservation Required? (Circle one) YES NO APPD PER ELLEN


Planning Review by/Date: [Signature] 5/4/2001

A list of items that must be reviewed by Planning is provided on the reverse side of this form.

MICROFILM AFTER FINAL

Local Bank & Trust
 meter 1331 Broadway
 Existing Panel with (1) 1/15 Breaker
 Feed by #6 AL
 Add (1) 1/20 Breaker
 Existing #6 AL
 Feeders

1/20 amp
 Contact
 E) 1/15 existing
 circuit → 1/2 conduct

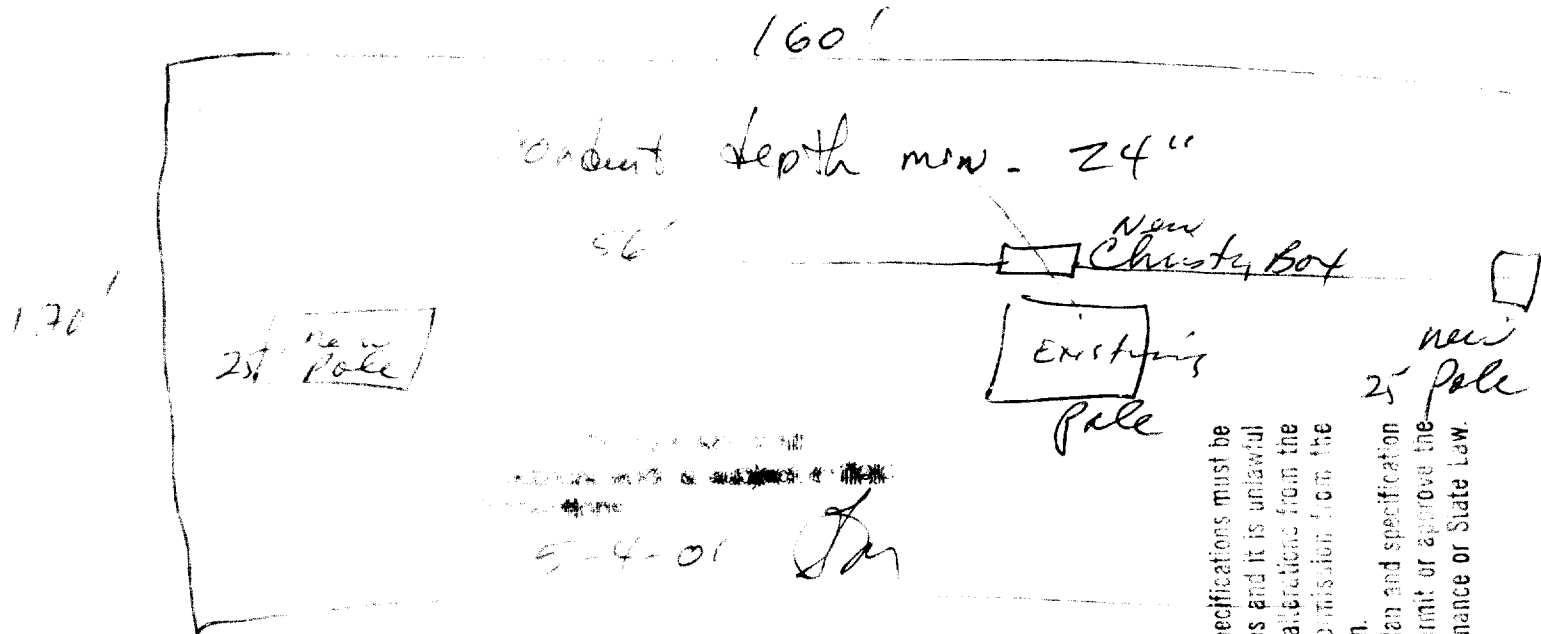

parking lot - 2 new Poles

new FC Reading Avg 2.47


USA Ticket # 178895
 Good - Nov 15th

ISSUED

MAY 04 2006

Building Division

This set of plans and specifications must be kept on the job at all times and it is unlawful to make any changes or alterations from the original without written permission from the Building Inspection Division.
 The approval of this plan and specification shall not be held to permit or approve the violation of any City Ordinance or State Law.



Square Straight Steel

4", 5" or 6" Shaft Width, 10' to 40' Mounting.
Only 4" Accepts KKS Series Luminaires (PT)

Anchor Base Poles

SSS

Ordering Information: See page 287

TECHNICAL INFORMATION

EPA (ft²) with 13 gust

Catalog Number	Nom mount ht. (ft)	Pole Shaft Size (in. x in. x ft)	Wa Thick. (in.)	Gauge	80 mph	Max wt.	90 mph	Max wt.	100 mph	Max wt.	Bolt Circle (in.)	Bolt Size (in. x in. x in.)	Approx ship wt. (lbs)
SSS 10 4C	10	4.0 x 10.0	0.125	11	20.6	765	23.8	595	19.9	473	8-9	3/4 x 18 x 3	75
SSS 12 4C	12	4.0 x 12.0	0.125	11	24.4	610	28.8	470	14.8	370	8-9	3/4 x 18 x 3	90
SSS 14 4C	14	4.0 x 14.0	0.125	11	19.9	495	15.1	372	11.7	293	8-9	3/4 x 18 x 3	100
SSS 16 4C	16	4.0 x 16.0	0.125	11	15.9	358	11.8	296	8.9	223	8-9	3/4 x 18 x 3	115
SSS 18 4C	18	4.5 x 18.0	0.125	11	12.6	215	9.1	230	6.7	168	8-9	3/4 x 18 x 3	125
SSS 20 4C	20	4.0 x 20.0	0.125	11	9.6	240	6.7	167	4.5	150	8-9	3/4 x 18 x 3	140
SSS 20 4G	20	4.0 x 20.0	0.188	7	6.5	415	12.25	310	9.3	240	8-9	3/4 x 30 x 3	198
SSS 20 5C	20	5.0 x 20.0	0.125	11	11.7	443	12.1	342	9.4	235	10-12	1 x 36 x 4	185
SSS 20 5G	20	5.0 x 20.0	0.188	7	28.1	733	21.4	535	16.2	405	10-12	1 x 36 x 4	265
SSS 25 4C	25	4.0 x 25.0	0.125	11	4.8	150	2.6	100	1.0	50	8-9	3/4 x 18 x 3	170
SSS 25 4G	25	4.0 x 25.0	0.188	7	10.8	270	7.7	188	5.4	135	8-9	3/4 x 30 x 3	245
SSS 25 5C	25	5.0 x 25.0	0.125	11	9.8	240	6.3	157	3.7	150	10-12	1 x 36 x 4	225
SSS 25 5G	25	5.0 x 25.0	0.188	7	8.0	350	12.6	350	9.0	250	10-12	1 x 36 x 4	320
SSS 30 4G	30	4.0 x 30.0	0.188	7	6.4	180	4.0	100	2.3	50	8-9	3/4 x 30 x 3	295
SSS 30 5C	30	5.0 x 30.0	0.125	11	4.7	150	2.0	50	—	—	10-12	1 x 36 x 4	265
SSS 30 5G	30	5.0 x 30.0	0.188	7	13.7	287	6.7	167	3.9	100	10-12	1 x 36 x 4	380
SSS 30 6G	30	6.0 x 30.0	0.188	7	15.7	392	10.2	257	6.4	150	11-13	1 x 36 x 4	520
SSS 35 5G	35	5.0 x 35.0	0.188	7	5.9	110	2.5	100	—	—	10-12	1 x 36 x 4	440
SSS 35 6G	35	6.0 x 35.0	0.188	7	4.5	237	5.0	150	1.8	50	11-13	1 x 36 x 4	510
SSS 39 6G	39	6.0 x 39.0	0.188	7	5.1	126	3.3	90	—	—	11-13	1 x 36 x 4	605

Features

Shaft: Weldable grade, hot-rolled, commercial-quality carbon steel tubing with a minimum yield of 55,000 psi (11-gauge), 50,000 psi (7-gauge). Uniform wall thickness of .125" or .188". Shaft is one-piece with a longitudinal, electric, resistance weld. Uniformly square in cross-section with flat sides, small corner radii and excellent torsional qualities. Available shaft widths are 4, 5 and 6 inches.

Anchor Base: Fabricated from hot-rolled carbon steel plate that meets or exceeds a minimum-yield strength of 36,000 psi. The anchor base is provided with slotted holes.

Anchor Bolts: Top 12" galvanized per ASTM A-153. Made of 3/4" or 1" diameter steel rod having a minimum-yield strength of 55,000 psi.

Grounding: Nut holder located immediately inside handhole rim is provided with a 1/2" x 13 UNC ground bolt and nut.

Handhole: Rectangular, reinforced handhole rim having nominal dimensions of 3"x5" for all shafts. Included is steel cover with attachment screws.

Hardware: Fasteners are high-strength, galvanized zinc-plated or stainless steel.

Top Cap: Weather-proof, high-strength plastic cap is provided for drill mount poles.

Finish: Dark bronze polyester powder paint (DDB) standard; optional polyester powder paint finishes available.




Base Cover: Full-base cover finished to match pole.

Note: If poles are stored outside, all protective wrapping must be removed immediately to prevent finish damage.

NOTES:
Mounting Arrangement: (PT) Only Open Top 4" pole accepts KKS (T, D, Z, 3) O.D. 1/2 NPS
Mounting: (DM) 9" fixture at 90° (DM2) 2 fixtures at 180°
Wind: see page 298. Brackets: See page 299

Pole Data

Shaft Base size	Bolt circle A	Bolt projection B	Base square	Anchor Bolt description	Warehouse Anchor Bolt description	Template number
4C	8-1/2"	2-3/4"	8"	ABSSS-4C	AB18-0	PJ50004
4G	8-1/2"	2-3/4"	8"	ABSSS-4G	AB30-0	PJ50004
5	10-12"	3-3/8"	11"	ABSSS-5	AB36-0	PJ50010
6	11-13"	3-3/8"	12-1/2"	ABSSS-6	AB36-0	PJ50011



NOTE: Installation requires grout to be packed under base to ensure full contact with foundation. Factory-supplied templates must be used when setting anchor bolts. Lithonia will not accept claim for incorrect anchorage placement due to failure to use Lithonia factory templates.

Do not erect poles without having fixtures installed.

