

**PLANNING DIRECTOR'S SPECIAL PERMIT**  
1231 "I" STREET, SUITE 200, SACRAMENTO, CA 95814

<b>APPLICANT</b>	Carolyn Delaney, 1560 48th Street, Sacramento, CA 95819			
<b>OWNER</b>	Carolyn Delaney, 1560 48th Street, Sacramento, CA 95819			
<b>PLANS BY</b>	Carolyn Delaney, 1560 48th Street, Sacramento, CA 95819			
<b>FILING DATE</b>	7/11/90	<b>ENVIR. DET.</b>	Exempt 15305 (a)	<b>REPORT BY :</b> DTH
<b>ASSESSOR'S PCL. NO.</b>	008-0424-013-0000			

**APPLICATION:** Planning Director's Special Permit to allow an 18.75' x 16.75' expansion of an existing house to be located three feet from the interior property line located on .14± developed acres located in the Standard Single Family (R-1) zone.

**LOCATION:** 1560 48th Street

**PROPOSAL:** The applicant is requesting the necessary entitlements to expand an existing residence which was constructed with a three foot side yard setback. The proposed expansion will be in keeping with the original line of the house.

**PROJECT INFORMATION:**

General Plan Designation:	Low Density Residential (4-15 du/na)
Existing Zoning of Site:	R-1
Existing Land Use of Site:	Single Family Residence

**Surrounding Land Use and Zoning:**

North: Single Family; R-1  
South: Single Family and Two Family; R-1  
East: Single Family; R-1  
West: Single Family; R-1

Property Dimensions:	40'± x 150'±
Property Area:	.14± acres
Square Footage of Existing Residence:	880± square feet
Square Footage of Proposed Expansion:	314± square feet
Height of Existing Residence & Proposed Expansion:	1 Story
Square Footage of Existing Garage:	340± square feet
Existing Lot Coverage:	20%
Proposed Lot Coverage:	26%

Exterior Materials:	Stucco
Exterior Colors:	White with Blue Trim
Roof Materials:	Composition Shingle
Topography:	Flat
Street Improvements:	Existing
Utilities:	Existing

## PROJECT EVALUATION:

### A. Land Use and Zoning

The subject site consists of a single parcel totaling 0.14± acres currently developed with a single family residence and a detached garage. The site is zoned Standard Single Family (R-1) and is designated for Low Density Residential (4-15 du/na) in the General Plan. The subject site is surrounded on the north, east and west by single family residences and on the south by single family and two family residences, zoned Standard Single Family Residential (R-1).

### B. Applicant's Proposal

The applicant is requesting a Planning Director's Special Permit in order to construct a 314± square foot expansion, to an existing residence, to be located three feet from the southern property line. As the existing residence was constructed with a three foot setback, the applicant is requesting to construct an 18.75' x 16.75' expansion to the rear of the residence and is proposing to construct the addition three feet from the southern property line. The applicant feels that in order to expand the house and maintain the original character of the structure, it is necessary to maintain the original line of the house which is located three feet from the property line.

### C. Staff Analysis

Staff has reviewed the applicant's proposal and surveyed the surrounding area and has found that most of the residences in the area were constructed with less than the required five foot setback. The existing residence is at three feet and in order to keep with the existing setback line of the house the proposed addition would need to be constructed with a three foot side yard setback. The applicant is proposing a stucco (white) with wood trim (blue) addition and composition shingles on the roof. The architecture proposed on the expansion is compatible to the existing residence. Staff, therefore, has no objections to the proposed expansion to the existing residence.

### D. Agency Comments

The proposed project was reviewed by City Building, Water and Sewer and the Engineering Development Division. No comments were received.

ENVIRONMENTAL REVIEW: This project is exempt from environmental review pursuant to State EIR Guidelines (CEQA), Section 15305 (a).

**RECOMMENDATION:** Staff recommends the Planning Director approve the Planning Director's Special Permit to expand an existing non-conforming single family residence subject to conditions and based upon findings of fact which follow.

Conditions

- 1. The addition shall follow the same setback as the existing residence (a minimum of three feet from the southern property line) and shall be located a minimum of six feet from the existing detached garage;
- 2. The proposed addition is to be used as extra living area for the existing residence and shall not be used as a second residential unit or apartment;
- 3. The applicant shall obtain all necessary building permits prior to construction of the addition.

Findings of Fact


- 1. The project, as conditioned, is based upon sound principles of land use in that a single family residence is a permitted use in a single family neighborhood.
- 2. The project, as conditioned, will not be detrimental to the public health, safety or welfare and will not result in the creation of a nuisance in that:
  - a. Adequate open space is provided on the site; and
  - b. The design is compatible with the existing residence and surrounding residences.
- 3. The project is consistent with the General Plan which designates the site Low Density Residential (4-15 du/na).

REPORT PREPARED BY:

  
 Dawn T. Holm, Planner


11-13-90  
 Date

REPORT APPROVED BY:

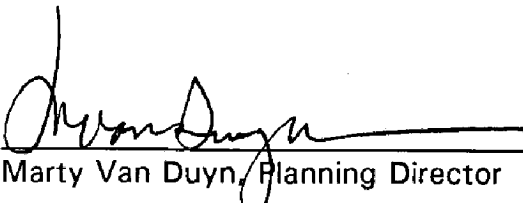  
 Marty Van Duyn, Planning Director

11-13-90  
 Date



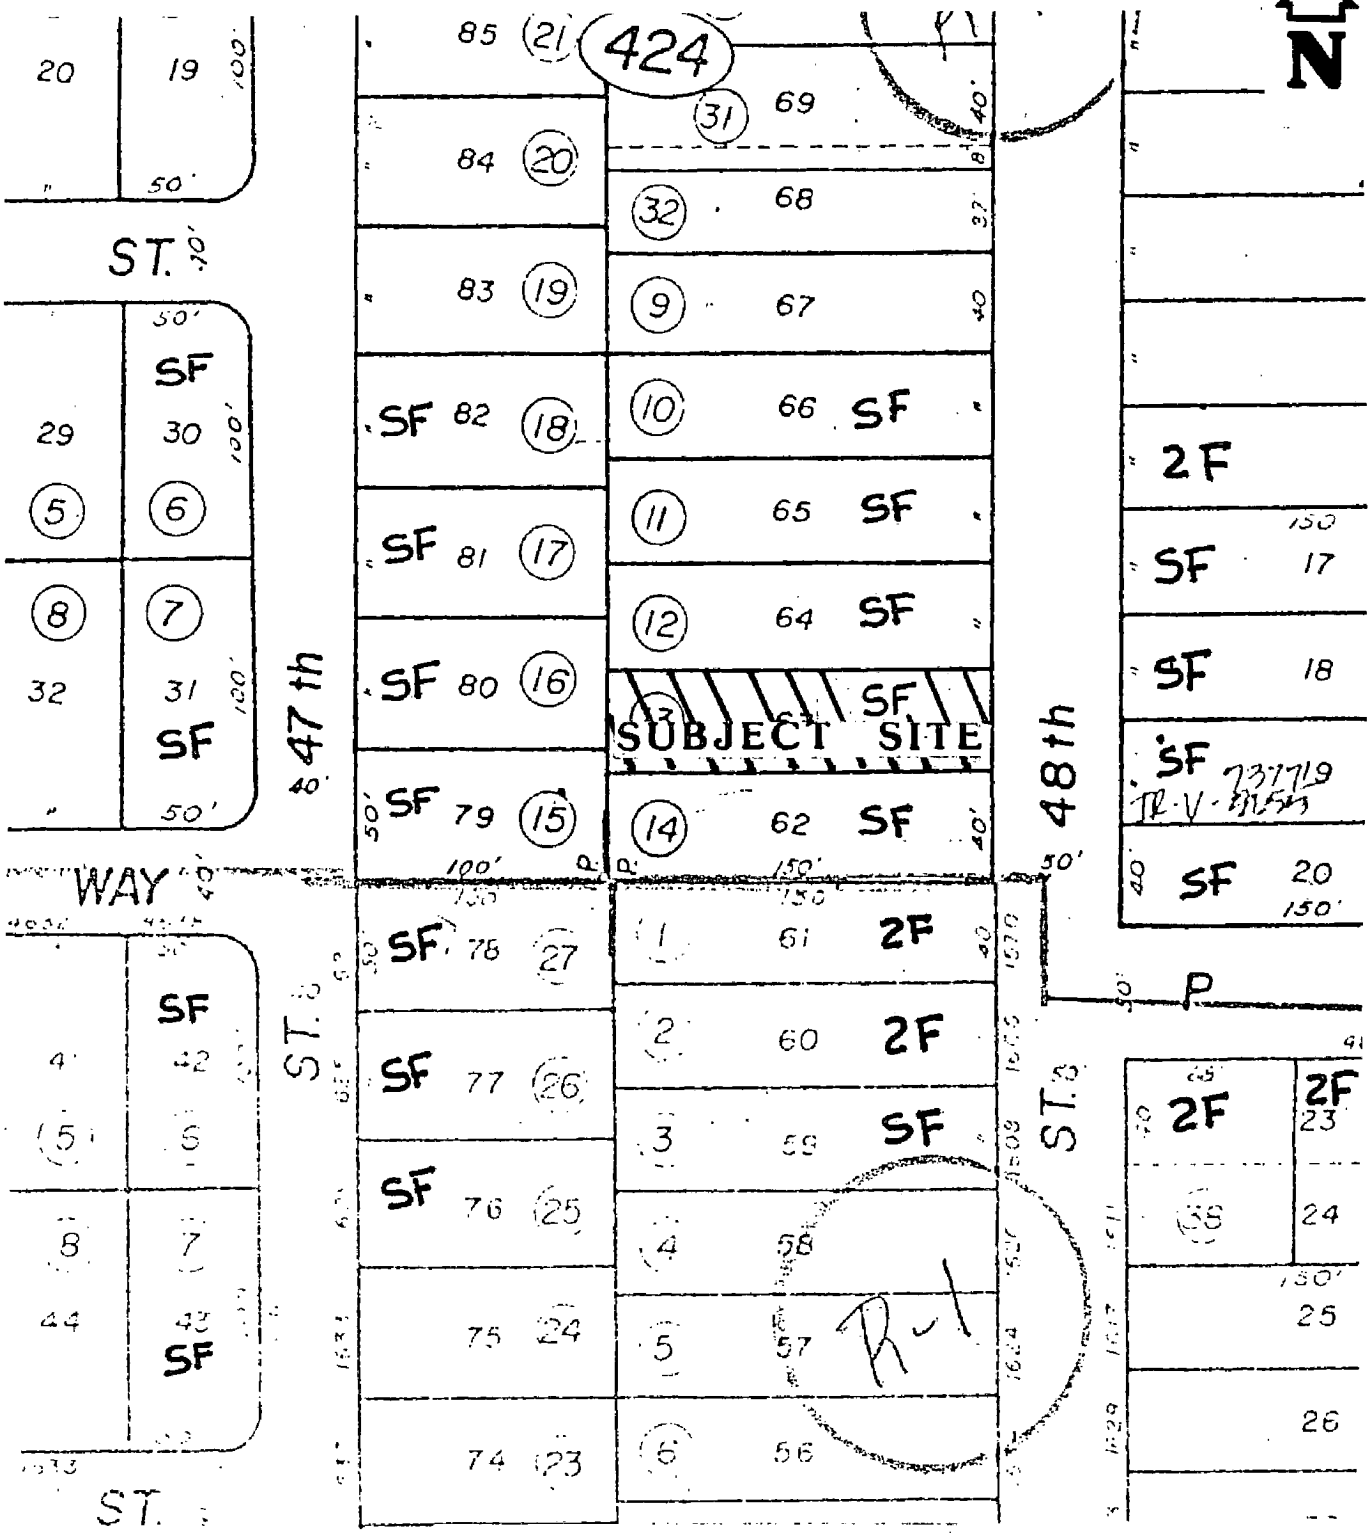


\*Entire Page  
Zoned R-1

LAND USE & ZONING MAP

000537

**EXHIBIT A**  
**SITE PLAN**

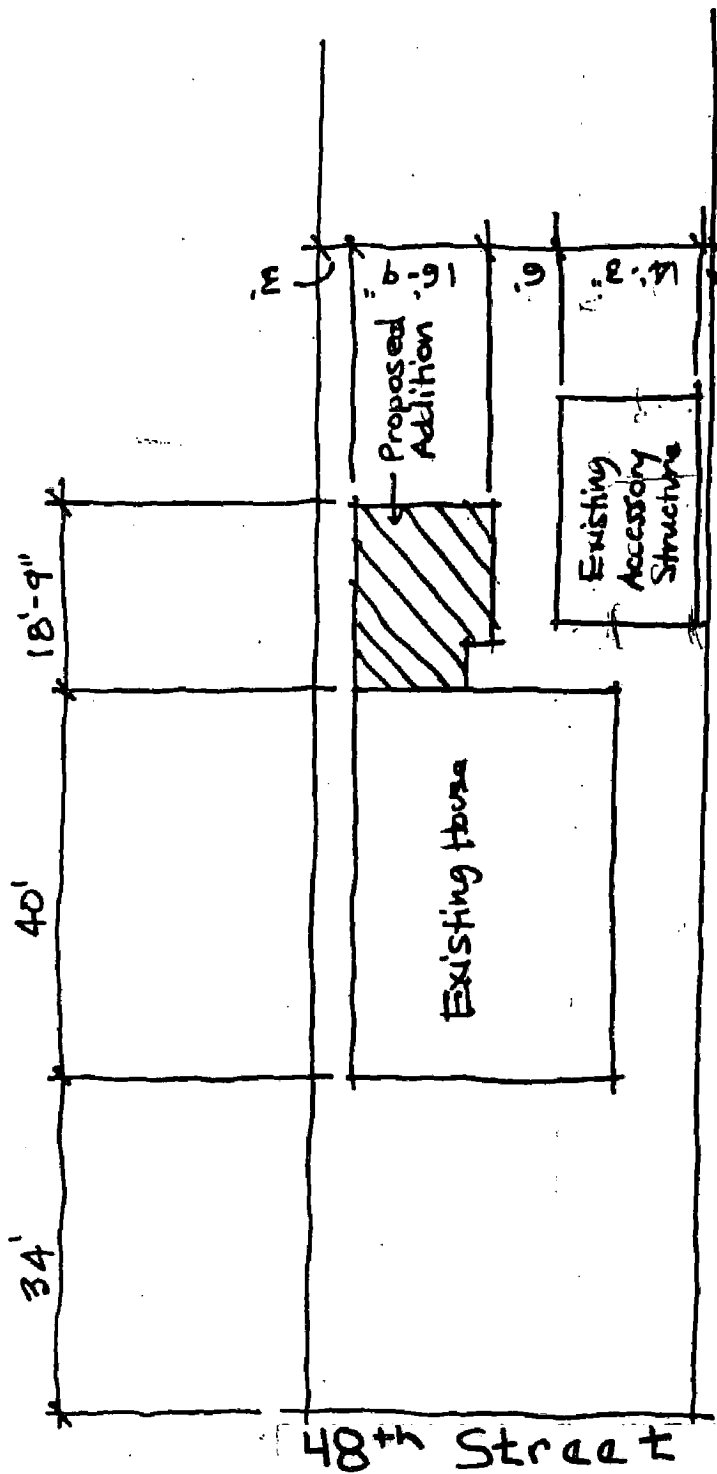

Site Plan  
1" = 20'


P90 314

P90-314

000538

**EXHIBIT A**  
**SITE PLAN**

P90 314

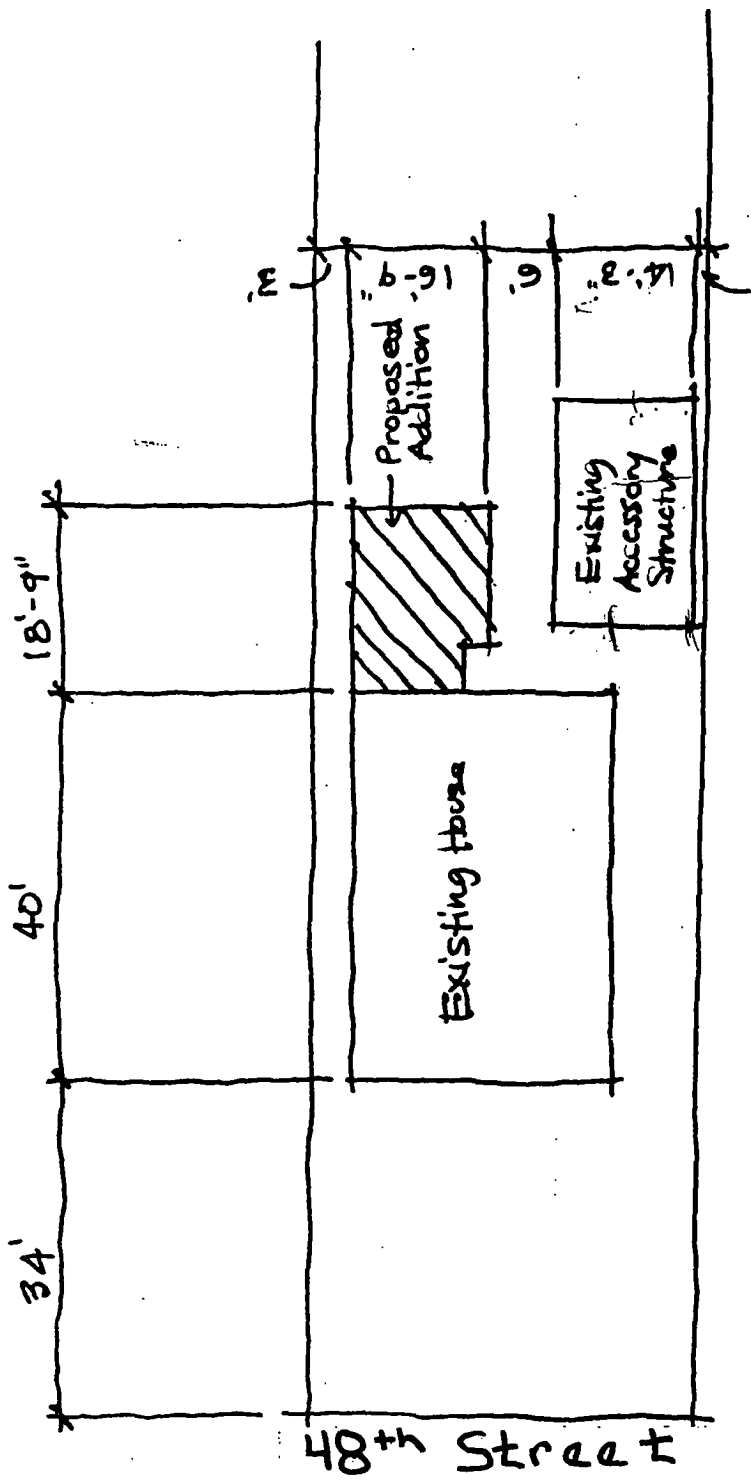


North  
Site Plan  
1" = 20'

000538

P90-314

**EXHIBIT B  
FLOOR PLANS**

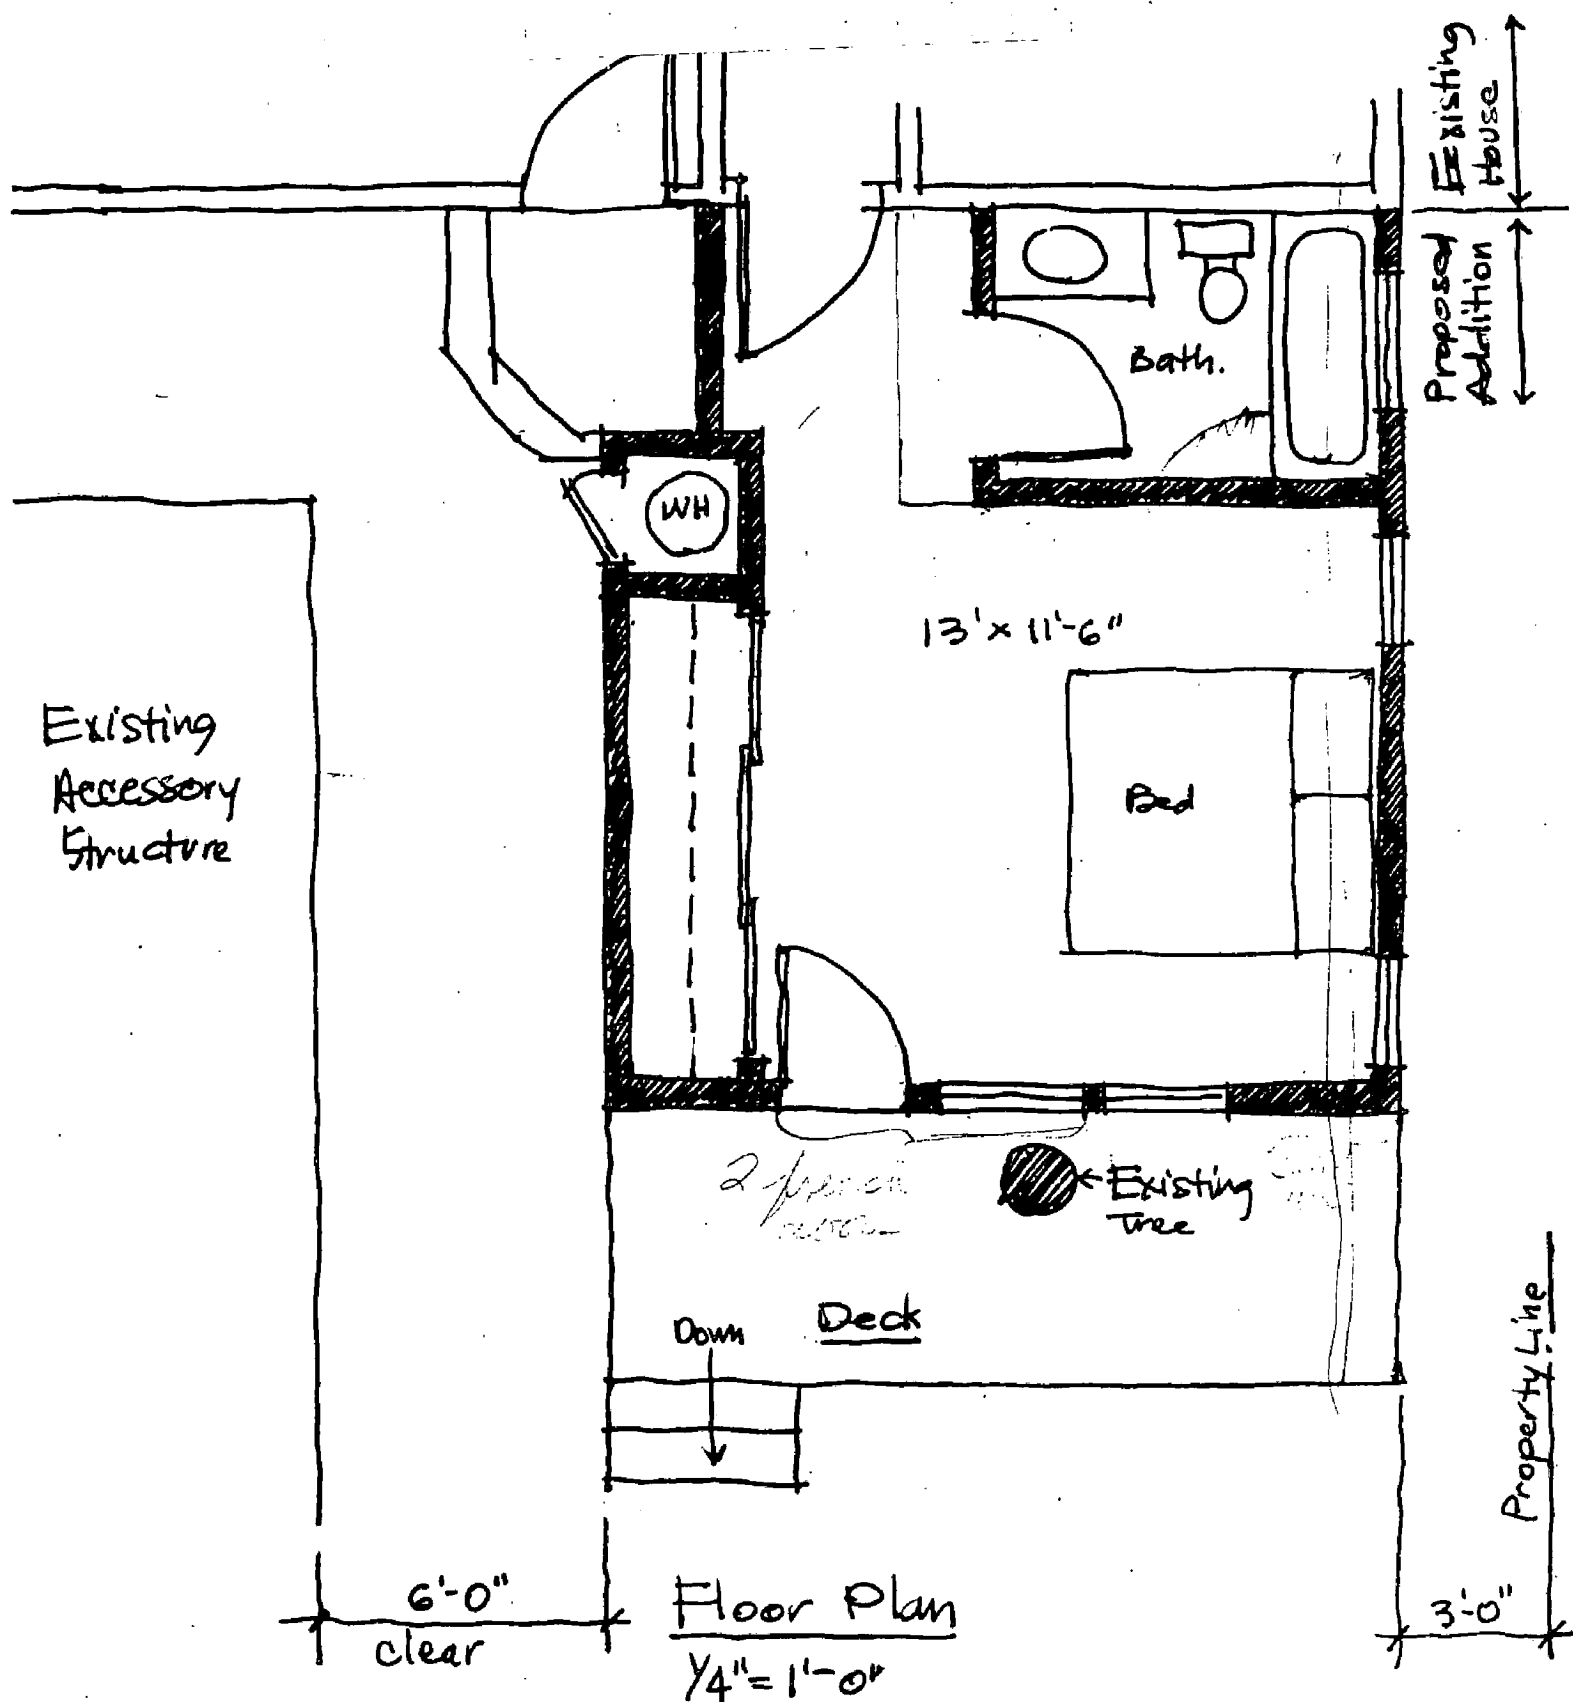

Existing  
Accessory  
Structure

Existing  
House  
Proposed  
Addition

13' x 11'-6"

Bed

2 french  
doors

Existing  
tree

Down Deck

Property Line

6'-0"  
clear

Floor Plan  
1/4" = 1'-0"

3'-0"

000539

P90-314

P90

31



EXHIBIT C-1  
ELEVATIONS




ear Elevation  $\frac{1}{4}'' = 1'-0''$

000540

P90-314

EXHIBIT C-2  
ELEVATIONS

Proposed Addition  
← Existing House

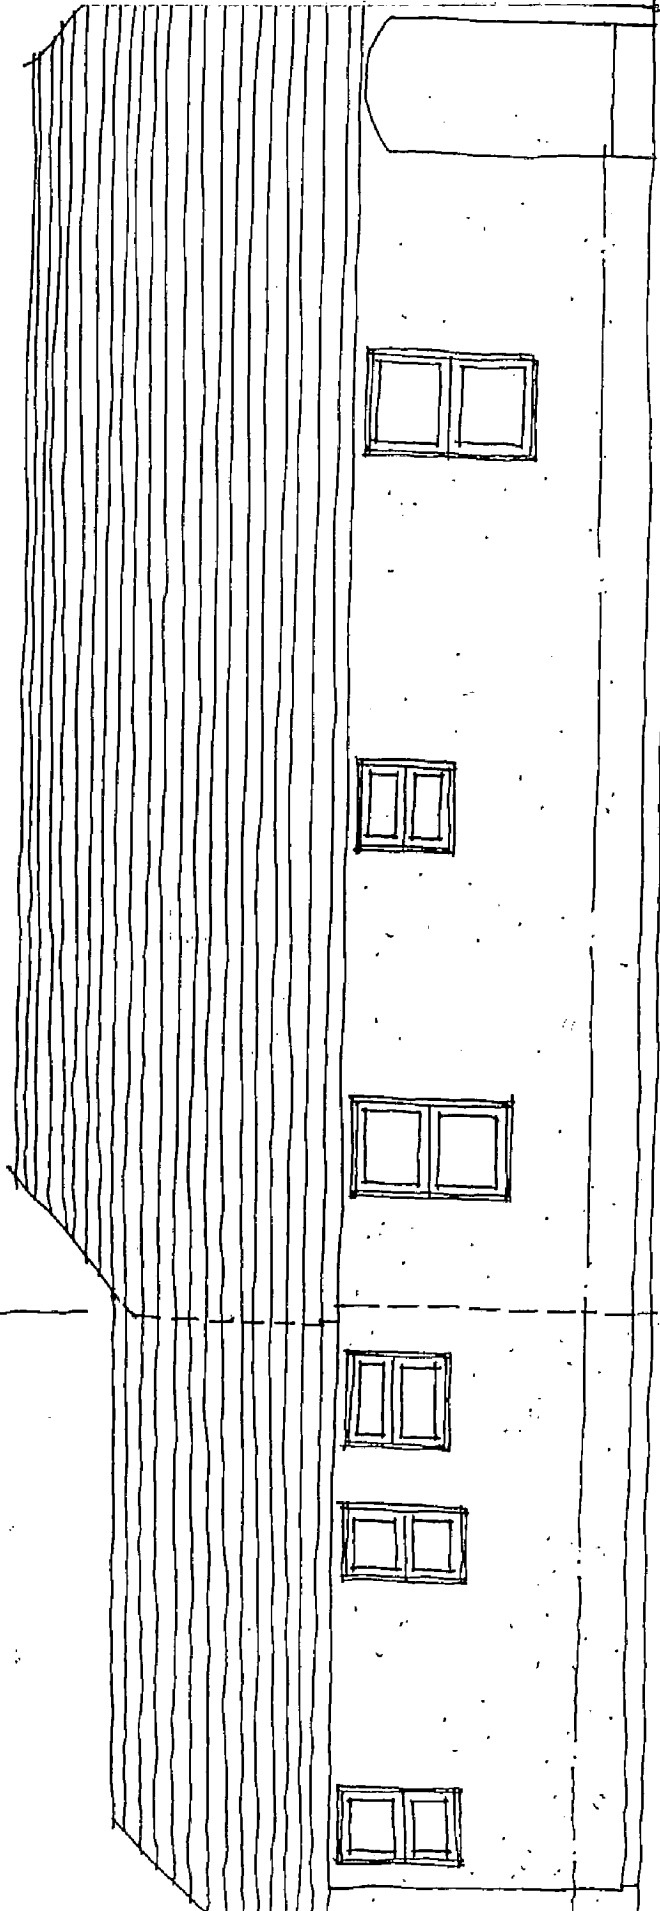

000541

790-314

Side Elevation (South)  
1/4" = 1'-0"